


FEATURES

- Works with SMPTE, EBU and IRIG time codes
- Transformer outputs for superior isolation
- BNC I/O connectors for ease of connection
- Balanced I/O available via DB-9 connector
- Two separate and isolated output channels



Rack mountable with RM4

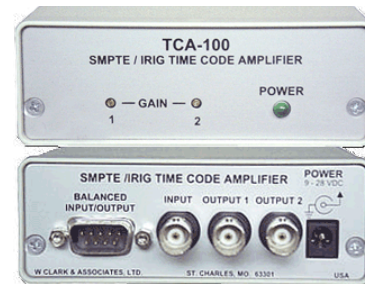

SPECIFICATIONS

Output Level

- > Up to 14V PP (with 600Ω load)
- > Each channel is individually adjustable with a front panel accessible level control

Output Options

Each output channel can be jumpered to provide:

- > isolated balanced to ground
- > single ended grounded
- > transformer isolated differential

Input Level

- > 2-14Vpp range of input for rated output

Frequency Response

- > 100 Hz to 8 kHz \pm 1dB

I/O Connectors

- > Balanced input via isolated BNC or 2 pins of DB-9 male connector
- > Transformer isolated, balanced output via isolated BNC or separate DB-9 connector pins
- > 2 mm male power plug

Physical

- > Weight: 16 oz (435 g)
- > Size: 4.2w x 1.5h x 5.5d in (10.6w x 3.8h x 14d cm)

Operating Parameters

- > Temperature: 0 to 60°C
- > Humidity: Up to 90% (non-condensing)

Power

- > Input voltage: 12-28VDC,
- > Power consumption: < 1W
- > External wall mount 120 or 220 VAC power supply

Compliance

- > FCC
- > CE Marked
- > ROHS
- > ANSI

MASTERCLOCK, INC.

5-YEAR LIMITED PARTS & LABOR WARRANTY

MADE IN THE USA

phone (USA and Canada):
+1-636-724-3666

phone (international):
1-800-940-2248

email:
sales@masterclock.com

online:
www.masterclock.com